# QUICK GUIDE MESH TRAY. POPULAR BRANDS.

PVX Multimount® · PVX Singlemount® · PVX Minimount®

✓ **suitable** on the wire stated ✓ **Z-mounting** alternating, see page 2 × **not suitable**

Support distance: always calculate with the **PVX Calculator**.

## Legrand Cablofil Fasclic+

| Product code | Size H × W (mm) | Multimount & Singlemount | Minimount |
|---|---|---|---|
| CM200066 | 54 × 50 | ✓ width wire only | ✓ width wire only |
| CM200076 | 54 × 100 | ✓ width and length wire | ✓ width and length wire |
| CM200086 | 54 × 150 | ✓ **Z-mounting** | × not suitable |
| CM200096 | 54 × 200 | ✓ width and length wire | ✓ width and length wire |
| CM200106 | 54 × 300 | ✓ width and length wire | × not suitable (max. 200 mm) |
| CM200206 | 54 × 400 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |
| CM200306 | 54 × 500 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |
| CM200406 | 54 × 600 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |

## Niedax MTC

| Product code | Size H × W (mm) | Multimount & Singlemount | Minimount |
|---|---|---|---|
| MTC 54.050 F | 54 × 50 | ✓ width wire only | ✓ width wire only |
| MTC 54.100 F | 54 × 100 | ✓ width and length wire | ✓ width and length wire |
| MTC 54.150 F | 54 × 150 | ✓ **Z-mounting** | × not suitable |
| MTC 54.200 F | 54 × 200 | ✓ width and length wire | ✓ width and length wire |
| MTC 54.300 F | 54 × 300 | ✓ width and length wire | × not suitable (max. 200 mm) |
| MTC 54.400 F | 54 × 400 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |
| MTC 54.500 F | 54 × 500 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |
| MTC 54.600 F | 54 × 600 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |

## OBO GRM

| Product code | Size H × W (mm) | Multimount & Singlemount | Minimount |
|---|---|---|---|
| GRM 55 x 50 | 50 × 55 | ✓ width and length wire | ✓ width and length wire |
| GRM 100 x 50 | 50 × 100 | ✓ width and length wire | ✓ width and length wire |
| GRM 150 x 50 | 50 × 150 | ✓ **Z-mounting** | × not suitable |
| GRM 200 x 50 | 50 × 200 | ✓ width and length wire | ✓ width and length wire |
| GRM 300 x 50 | 50 × 300 | ✓ width and length wire | × not suitable (max. 200 mm) |
| GRM 400 x 50 | 50 × 400 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |

**PVX Mounting Systems®**
Handelskade 5.04, NL-4205 AC Gorinchem · +31 (0)6-40235633
info@pvxmountingsystems.com · www.pvxmountingsystems.com

**Quick guide mesh tray EN**
Version 2026.1
Subject to change.

## Stago Performa


| Product code | Size H × W (mm) | Multimount & Singlemount | Minimount |
|---|---|---|---|
| CSU4518206 | 60 × 60 | ✓ width wire only | × not suitable |
| CSU4518210 | 70 × 100 | ✓ width and length wire | ✓ width and length wire |
| CSU4518215 | 70 × 150 | ✓ **Z-mounting** | × not suitable |
| CSU4518220 | 70 × 200 | ✓ width and length wire | ✓ width and length wire |
| CSU4518230 | 70 × 300 | ✓ width and length wire | × not suitable (max. 200 mm) |
| CSU4518240 | 70 × 400 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |
| CSU4518250 | 70 × 500 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |
| CSU4518260 | 70 × 600 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |

## Trayco Light

| Product code | Size H × W (mm) | Multimount & Singlemount | Minimount |
|---|---|---|---|
| MTL60-050-3UG | 60 × 50 | × not suitable | × not suitable |
| MTL60-100-3UG | 60 × 100 | ✓ width and length wire | ✓ width and length wire |
| MTL60-150-3UG | 60 × 150 | ✓ **Z-mounting** | × not suitable |
| MTL60-200-3UG | 60 × 200 | ✓ width and length wire | ✓ width and length wire |
| MTL60-300-3UG | 60 × 300 | ✓ width and length wire | × not suitable (max. 200 mm) |
| MTL60-400-3UG | 60 × 400 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |
| MTL60-500-3UG | 60 × 500 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |
| MTL60-600-3UG | 60 × 600 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |

## Valdinox

| Product code | Size H × W (mm) | Multimount & Singlemount | Minimount |
|---|---|---|---|
| EC60.060HDG | 60 × 60 | × not suitable | × not suitable |
| EC60.100HDG | 60 × 100 | ✓ width and length wire | ✓ width and length wire |
| EC60.150HDG | 60 × 150 | ✓ **Z-mounting** | × not suitable |
| EC60.200HDG | 60 × 200 | ✓ width and length wire | ✓ width and length wire |
| EC60.300HDG | 60 × 300 | ✓ width and length wire | × not suitable (max. 200 mm) |
| EC60.400HDG | 60 × 400 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |
| EC60.500HDG | 60 × 500 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |
| EC60.600HDG | 60 × 600 (2 pcs) | ✓ width and length wire | × not suitable (max. 200 mm) |

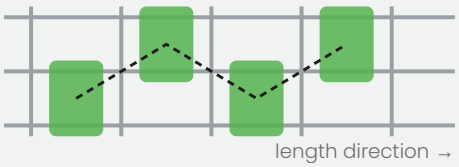


**Z-mounting (mesh tray 150 mm wide).** This mesh tray has three length wires. You mount the PVX Multimount or Singlemount alternately: the first on the left two length wires, the next on the right two, then left again, and so on. Seen from above, this creates a Z pattern. As with standard mounting, the distance between the supports is determined with the **PVX Calculator**.

**Multimount and Singlemount** give the same result for all brands. Mesh trays from 400 mm wide are mounted with 2 units side by side. Always calculate the support distance of your cable route with the **PVX Calculator**. The **Minimount** is suitable for mesh trays up to and including 200 mm wide. For the Minimount on pitched roofs and walls, the support distances are given in the installation manual. Always check the grid and wire thickness (max. Ø 6.2 mm) before use, see the installation manual.

**PVX Mounting Systems®**
Handelskade 5.04, NL-4205 AC Gorinchem · +31 (0)6-40235633
info@pvxmountingsystems.com · www.pvxmountingsystems.com

**Quick guide mesh tray EN**
Version 2026.1
Subject to change.