
PVX SINGLEROOF® 75
ON THE WALL. PROTECTED.

Article no. **PVX01052026** · Wall · Made in Holland

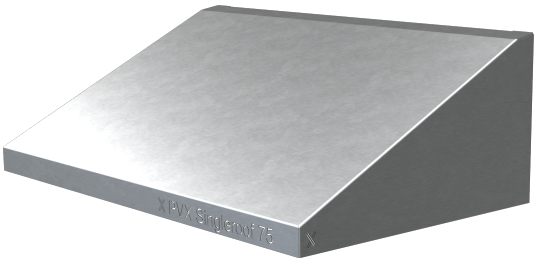

A compact protective roof, mounted **on the wall** directly above the inverter, battery or other technical installation. Made of **1.5 mm steel with Magnelis® ZM310 coating**, self-healing at the cut edges.

Shields against direct rain, snow, UV radiation and dirt. **Fixing material included.**

Installation in 5 steps.
Use all 7 fixing points every time.

TECHNICAL SPECIFICATIONS

Dimensions (L × D × H)	75 × 45 × 25 cm
Material	Steel, 1.5 mm
Coating	Magnelis® ZM310 (Zn-Al-Mg), self-healing at the cut edges
Weight	6.7 kg
Fixing points	7
Fixing material	Included, for concrete (C20/25), solid brick (MZ12) and solid sand-lime brick (KZ12). Other substrates: please contact us
Fire class	A1 according to NEN-EN 13501-1
Packaging	Per unit in a box, 76 × 46.5 × 28 cm; 12 per pallet

Wind load calculated

In accordance with NEN-EN 1991-1-4:2011, NEN 7250:2014 and CUR Recommendation 103:2005. Up to 33.8 m/s.

15-year warranty

Product and application warranty, provided installation follows the installation manual, using all fixing points.

Colours

Silver, RAL 7016 anthracite grey and RAL 9016 traffic white from stock. Other RAL colours on request.

PVX Mounting Systems®
Handelskade 5.04, NL-4205 AC Gorinchem · +31 (0)6-40235633
info@pvxmountingsystems.com · www.pvxmountingsystems.com

Technical datasheet EN
Version 2026.1
Subject to change.