
PVX MINIMOUNT®
SCREWED. WATERTIGHT.

Article no. **PVX16032021** · Pitched roof & wall · Made in Holland

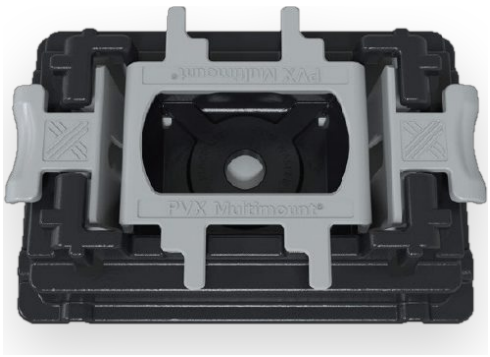

Multifunctional mounting system for installing **mesh trays on pitched roofs and walls**. The Minimount is screwed directly onto the roof or façade and, thanks to the EPDM seal, **can be installed watertight**.

With the Multilock system you mount the mesh tray hands-free.

> **Hands-free mounting with Multilock.**
> For mesh trays 60 – 200 mm wide.

TECHNICAL SPECIFICATIONS

Dimensions (L × W × H)	96 × 65 × 27 mm
Mesh tray	60 – 200 mm wide, with option for 1× mesh tray clip
Max. load per support	250 kg, incl. snow load
Weight	50 g
Material	Nylon PA6GF30, halogen-free, UV-stable
Colour	Black, mesh tray clip grey
Application	Pitched roof, wall
Multilock system	Hands-free mounting
Watertight installation	EPDM
Fixing	Screw Ø 6.3 mm with EPDM sealing washer (not supplied)
Grid dimensions	Check before use, see installation manual
Temperature	-40 °C to +100 °C
Packaging	Box of 36 pcs, 20 × 20 × 17.5 cm, approx. 1.9 kg

Wind certified

By consultancy Peutz. In accordance with NEN-EN 1991-1-4:2011, NEN 7250:2014 and CUR Recommendation 103:2005. Up to wind force 10 (24.5–28.4 m/s).

15-year warranty

Product and application warranty, provided the support distance is approved by the PVX Calculator.

Watch the installation videos
Scan or click

PVX Mounting Systems®
Handelskade 5.04, NL-4205 AC Gorinchem · +31 (0)6-40235633
info@pvxmountingsystems.com · www.pvxmountingsystems.com

Technical datasheet EN
Version 2026.1
Subject to change.